



ACT Black 1 meter U/UTP CAT6A LSZH Slimline patch cable with RJ45 connectors 90° angled down to 90° angled down

Brand : ACT

Product code: DD5901

Product name : Black 1 meter U/UTP CAT6A LSZH Slimline patch cable with RJ45 connectors 90° angled down to 90° angled down



Black 1 meter U/UTP CAT6A LSZH Slimline patch cable with RJ45 connectors 90° angled down to 90° angled down

ACT Black 1 meter U/UTP CAT6A LSZH Slimline patch cable with RJ45 connectors 90° angled down to 90° angled down:

CAT6A U/UTP slimline datacenter patch cables are smaller in diameter (3.6mm vs 5.9mm) than regular CAT6A patch cords. The bend radius is smaller compared to standard patch cords. This results in better airflow in the server rack or network cabinet.

The patch cable has two 90° angled down RJ45 connectors. Ideal for situations where space is limited without compromising the bend radius. For example in network cabinets and behind equipment.


Also available with a straight, 90° angled up, left or right RJ45 connector.

The use of a LSZH (Low Smoke Zero Halogen) cable jacket reduces the risk of high concentrations of toxic gases if the cable is damaged by fire or short circuit.

The ACT U/UTP patch cable has full copper 28AWG wires and 50μ gold-plated RJ45 contacts and complies with the international standard ANSI/TIA-568.2-D.



Features		Features	
Product colour *	Black	Frequency	500 MHz
Cable length *	1 m	Bend radius (min)	1.5 cm
Cable standard *	Cat6a	Power over Ethernet (PoE)	✓
Cable shielding *	U/UTP (UTP)	Power over Ethernet (PoE) type supported	PoE+
Connector 1 *	RJ-45	Total Power over Ethernet (PoE) budget	30 W
Connector 2 *	RJ-45	Operational conditions	
Connector 1 gender *	Male	Operating temperature (T-T)	-20 - 60 °C
Connector 2 gender *	Male	Sustainability	
Connector 1 form factor	Down	Doesn't contain	Halogen
Connector 2 form factor	Down	Certificates	
Connector contacts plating	Gold	Compliance certificates	CE
Jacket material	Low smoke zero halogen (LSZH)	Weight & dimensions	
Cable shape	Round	Outer diameter	3.6 mm
Conductor material	Copper	Packaging content	
Networking standards	IEEE 802.3at	Quantity per pack	1 pc(s)
AWG wire size	28		

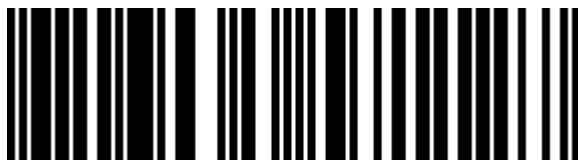

8716065571127

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.