



HP LaserJet Tank MFP 2604sdw Printer

Brand : HP

Product family: LaserJet

Product code: 381V1A#B19

Product name : LaserJet Tank
MFP 2604sdw Printer

- Two-sided printing; Scan to email; Scan to PDF
 - Print speed up to 22ppm (black, A4)
 - Up to 600 x 600 dpi
- LaserJet Tank MFP 2604sdw Printer

[HP LaserJet Tank MFP 2604sdw Printer:](#)

Powerful productivity. Super-affordable refill. Discover business-ready capabilities and savings with HP LaserJet Tank MFP 2604sdw All-in-One Printer pre-filled with up to 5,000 pages of Original HP Toner.^[1]


HP LaserJet Tank MFP 2604sdw Printer. Print technology: Laser, Printing: Mono printing, Maximum resolution: 600 x 600 DPI. Copying: Colour copying, Maximum copy resolution: 600 x 1200 DPI. Scanning: Colour scanning, Optical scanning resolution: 600 x 600 DPI. Duplex functions: Print, Copy. Maximum ISO A-series paper size: A4. Wi-Fi. Direct printing. Product colour: Black, Grey



Printing		Performance	
Duplex printing mode	Auto	Sound pressure level (scanning)	40 dB
Print resolution black	600 x 600 DPI	Sound pressure level (standby)	16 dB
Print technology *	Laser	Sound power level (printing)	6.3 dB
Printing *	Mono printing	Design	
Duplex printing *	✓	Product colour *	Black, Grey
Maximum resolution *	600 x 600 DPI	Market positioning *	Home & office
Print speed (black, normal quality, A4/US Letter) *	22 ppm	Built-in display *	✓
Warm-up time	40 s	Display	LCD
Time to first page (black, normal)	8 s	Display diagonal	3 cm (1.18")
Secure printing	✓	Control type	Buttons
Copying		Colour display	✗
Duplex copying *	✓	Power	
Copying *	Colour copying	Power consumption (PowerSave)	0.05 W
Maximum copy resolution *	600 x 1200 DPI	Power consumption (printing)	390 W
Maximum copy size	A4	Power consumption (ready)	2.7 W
Copy speed (black, normal quality, A4)	14 cpm	Power consumption (sleep)	0.51 W
Auto fit function	✓	Power consumption (off)	0.05 W
Scanning		Energy Star Typical Electricity Consumption (TEC)	0.194 kWh/week
Duplex scanning *	✗	AC input voltage	110 - 240 V
Scanning *	Colour scanning	AC input frequency	50/60 Hz
Optical scanning resolution *	600 x 600 DPI	Brand-specific features	
Optical scanning resolution (black)	600 x 1200 ppi	HP Auto-On/Auto-Off	✓
Maximum scan area	216 x 297 mm		
Scanner type *	Flatbed scanner		
Scan technology	CIS		
Scan to	TWAIN, Software		
Scan speed (colour)	10 ppm		

Scanning		Brand-specific features	
Scan speed (black)	19 ppm	HP Security tools	Secure Boot, Secure Firmware Integrity, Runtime Code Integrity, password protected EWS, secure browsing via SSL/TLS 1.0, TLS 1.1, TLS 1.2; TLS 1.0/1.1 disabled by default; OpenSSL version 1.1.1; Enable/disable Network ports; SNMPv1, SNMPv2, and SNMPv3, Community password change; Secure defaults, Encrypted data at rest, Active FW update, Admin password by default, Cipher & TLS selection; Account lockout; Secure Wi-Fi setup
Image formats supported	TIFF, Raw, JPEG, PNG, BMP		
Document formats supported	PDF		
Input colour depth	24 bit		
Greyscale levels	256		
Scan drivers	TWAIN		
Fax			
Faxing *	✗		
Features			
Recommended duty cycle	250 - 2500 pages per month	HP GTIN (EAN/UPC) with options	(ABT) 196068829087; (ABY) 195908729297; (B19) 195908729303; (BAZ) 195908729310
Maximum duty cycle *	25000 pages per month		
Duplex functions *	Print, Copy		
Number of print cartridges *	1	HP GTIN (EAN/UPC)	196068829087, 195908729297, 195908729303, 195908729310
Printing colours *	Black		
Page description languages	PCLmS, PWG, URF		
All-In-One-multitasking	✓	System requirements	
Country of origin	Vietnam	Windows operating systems supported	Windows 10, Windows 11
Replacement cartridges	DM: HP 153A Black LaserJet Tank Toner Reload Kit (Yield ~2500 pages); HP 153X Black LaserJet Tank Toner Reload Kit (Yield ~5000 pages); RoEM: HP 154A Black LaserJet Tank Toner Reload Kit (Yield ~2500 pages); HP 154X Black LaserJet Tank Toner Reload Kit (Yield ~5000 pages)	Mac operating systems supported	Mac OS X 10.15 Catalina, Mac OS X 10.15.3 Catalina, Mac OS X 11.0 Big Sur, Mac OS X 12.0 Monterey, MacOS
	HP segment	Linux operating systems supported	✓
Input & output capacity		Server operating systems supported	Windows Server 2008 R2, Windows Server 2008 R2 x64, Windows Server 2012 R2, Windows Server 2012 R2 x64, Windows Server 2016 x64
Total number of input trays *	1	Other operating systems supported	Linux
Total input capacity *	250 sheets	Operational conditions	
Total output capacity *	100 sheets	Operating relative humidity (H-H)	10 - 80%
Paper tray 1 input capacity	250 sheets	Recommended humidity operating range	30 - 70%
Auto document feeder (ADF)	✓	Recommended operating temperature range (T-T)	17.5 - 25 °C
Auto document feeder (ADF) input capacity	40 sheets	Storage temperature (T-T)	-20 - 60 °C
Maximum number of input trays	1	Operating temperature (T-T)	15 - 32.5 °C
Maximum input capacity	250 sheets	Certificates	
Maximum output capacity	100 sheets	Certification	CISPR32:2015 & CISPR 35:2016 /EN55032:2015 - Class B; EN 61000-3-2:2019; EN 61000-3-3:2013+A1:2019; EN 55035:2017; FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 6
Paper handling			
Maximum ISO A-series paper size *	A4		
Maximum print size	216 x 355.6 mm	Sustainability	
Paper tray media types *	Plain paper, Bond paper, Envelopes, Labels, Heavy paper, Lightweight paper	Sustainability compliance	✓
ISO A-series sizes (A0...A9) *	A4, A5, A6	Sustainability certificates	ENERGY STAR, Blue Angel, EPEAT Silver
ISO B-series sizes (B0...B9)	B5	Sustainable technologies and materials	Recyclable through HP Planet Partners; Contains post-consumer recycled plastic
ISO C-series sizes (C0...C9)	C5		
JIS B-series sizes (B0...B9)	B5, B6		
Envelopes sizes	10, B5, C5, DL	Weight & dimensions	
Custom media width	102 - 215.9 mm	Width	418 mm
Custom media length	152 - 355.6 mm	Depth	345 mm
Paper tray media weight	60 - 163 g/m²	Height	311.4 mm
Envelope feeder	No	Weight	9.5 kg
Ports & interfaces		Packaging data	
Direct printing *	✓	Package width	497 mm
USB port	✓	Package depth	398 mm
USB 2.0 ports quantity	1	Package height	409 mm
Network		Package weight	12.6 kg
Wi-Fi *	✓		

Network		Packaging content		
Ethernet LAN *	✓	Cartridge(s) included	✓	
Cabling technology	10/100Base-T(X)	Included cartridge capacity (black)	5000 pages	
Ethernet LAN data rates	10,100 Mbit/s	Cables included	AC	
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n)	Bundled software	No CD inbox (except Indonesia and China Gov) Downloadable Software from hp.com or 123.hp.com #CD include HP Software Installer, Uninstaller, printer driver and other essential tools	
Wi-Fi Direct	✓			
Bluetooth	✓			
Security algorithms	SNMPv3, SSL/TLS, SNMPv2, SNMP, TLS	Technical details Box contentsHP LaserJet Tank MFP 2604sdw Printer; HP Black Original LaserJet Tank Imaging Drum (introductory ~5000 page black toner yield provided); Power Cord, Setup Guide; Reference Guide; Regulatory/Support Flyers Master (outer) cases per pallet layer6 pc(s) Compliance certificatesGS mark, CCC, EAC, BIS, Federal Communications Commission (FCC), CE, BSMI General Product Safety Regulation (GPSR) URLhttps://support.hp.com/gb-en/product/details/hp-laserjet-tank-mfp-2602-2606-printer-series/model/z100846453?sku=381V1A ; https://kaas.hpcloud.hp.com/pdf-public/pdf_4620941_en-US-1.pdf ; https://kaas.hpcloud.hp.com/pdf-public/pdf_4620941_en-US-1.pdf		
Mobile printing technologies	Mopria Print Service, Apple AirPrint			
Performance		Other features		
Maximum internal memory	64 MB	Number of users	5 user(s)	
Internal memory *	64 MB	Custom media sizes	102 x 152 to 215.9 x 355.6 mm	
Built-in processor	✓	Recommended system requirements	Microsoft Windows 11; 10; 2 GB available hard disk space; Internet connection; Microsoft Internet Explorer or Edge. Apple macOS v10.15 Catalina; macOS v11 Big Sur; macOS v12 Monterey; 2 GB HD; Internet required.	
Processor frequency	500 MHz		Compatible operating systems	Windows 11; Windows 10; macOS 10.15 Catalina; macOS 11 Big Sur; macOS 12 Monterey; Linux
Sound pressure level (printing)	49 dB		Acoustic power emissions (ready)	25 dB
		Acoustic pressure emissions bystander (ready)	16 dB	
		Typical electricity consumption (TEC) number	Energy Star: 0.194Kwh/week; Blue Angel: 0.203Kwh/week	
		UNSPSC-code	43212110	
		Electromagnetic compatibility	CISPR32:2015 & CISPR 35:2016 /EN55032:2015 - Class B; EN 61000-3-2:2019; EN 61000-3-3:2013+A1:2019; EN 55035:2017; FCC Title 47 CFR, Part 15 Class B/ICES-003, Issue 6	

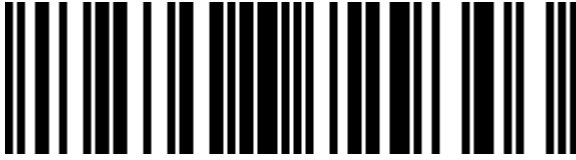

0195908729303



195908729303

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 11-APR-2026. Prints or copies of Information are only valid on the printed Publication date